



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|  |           |   |
|--|-----------|---|
| <b>(51) International Patent Classification <sup>6</sup> :</b><br><b>A61M 5/20</b>   | <b>A1</b> | <b>(11) International Publication Number:</b> <b>WO 97/48430</b><br><b>(43) International Publication Date:</b> 24 December 1997 (24.12.97)   |
| <b>(21) International Application Number:</b> PCT/GB97/01614<br><b>(22) International Filing Date:</b> 16 June 1997 (16.06.97)<br><b>(30) Priority Data:</b><br>9612724.6                      18 June 1996 (18.06.96)                      GB<br><b>(71) Applicant (for all designated States except US):</b> OWEN MUMFORD LIMITED [GB/GB]; Brook Hill, Woodstock, Oxford OX20 1TU (GB).<br><b>(72) Inventors; and</b><br><b>(75) Inventors/Applicants (for US only):</b> MARSHALL, Jeremy [GB/GB]; 16 Cranham Street, Jericho, Oxford OX2 6DD (GB). CROSSMAN, David, Danvers [GB/GB]; The Tower, Christmas Common, Oxford OX9 5HL (GB).<br><b>(74) Agents:</b> LAINE, Simon, James et al.; Wynne-Jones, Laine & James, 22 Rodney Road, Cheltenham, Gloucestershire GL50 1JJ (GB).  |           | <b>(81) Designated States:</b> JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).<br><br><b>Published</b><br><i>With international search report.</i><br><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> |
| <b>(54) Title:</b> IMPROVEMENTS RELATING TO INJECTION DEVICES<br><div data-bbox="316 1123 1323 1396" data-label="Image"> </div><br><b>(57) Abstract</b><br><p>An injection device has a two part barrel. The forward part (10) telescopes into the rear part (3) and within the barrel a capsule (1) with a needle (2) at its forward end is initially held by a trigger (11) formed integrally with the forward part (10) so that the needle (2) does not project. The trigger (11) is inoperable at this stage, being inaccessible because of the telescopic overlap. A spring (20) acts on a plunger at the rear of the capsule. When the overlap is increased, the trigger (11) becomes accessible through a slot (7), and when it is operated the capsule (1) is released for the spring (20) to shoot it forwards and eject the dose through the now projecting needle (2). The capsule (1) may have a two part dose and its mixing may then be effected by the spring (20), fully compressed after the overlap increase, urging the plunger forwards.</p> |           |   |

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

|    |                          |    |  |    |  |    |                          |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania                  | ES | Spain                                    | LS | Lesotho                                      | SI | Slovenia                 |
| AM | Armenia                  | FI | Finland                                  | LT | Lithuania                                    | SK | Slovakia                 |
| AT | Austria                  | FR | France                                   | LU | Luxembourg                                   | SN | Senegal                  |
| AU | Australia                | GA | Gabon                                    | LV | Latvia                                       | SZ | Swaziland                |
| AZ | Azerbaijan               | GB | United Kingdom                           | MC | Monaco                                       | TD | Chad                     |
| BA | Bosnia and Herzegovina   | GE | Georgia                                  | MD | Republic of Moldova                          | TG | Togo                     |
| BB | Barbados                 | GH | Ghana                                    | MG | Madagascar                                   | TJ | Tajikistan               |
| BE | Belgium                  | GN | Guinea                                   | MK | The former Yugoslav<br>Republic of Macedonia | TM | Turkmenistan             |
| BF | Burkina Faso             | GR | Greece                                   |    |  | TR | Turkey                   |
| BG | Bulgaria                 | HU | Hungary                                  | ML | Mali   | TT | Trinidad and Tobago      |
| BJ | Benin                    | IE | Ireland                                  | MN | Mongolia                                     | UA | Ukraine                  |
| BR | Brazil                   | IL | Israel                                   | MR | Mauritania                                   | UG | Uganda                   |
| BY | Belarus                  | IS | Iceland                                  | MW | Malawi                                       | US | United States of America |
| CA | Canada                   | IT | Italy                                    | MX | Mexico                                       | UZ | Uzbekistan               |
| CF | Central African Republic | JP | Japan                                    | NE | Niger  | VN | Viet Nam                 |
| CG | Congo                    | KE | Kenya                                    | NL | Netherlands                                  | YU | Yugoslavia               |
| CH | Switzerland              | KG | Kyrgyzstan                               | NO | Norway                                       | ZW | Zimbabwe                 |
| CI | Côte d'Ivoire            | KP | Democratic People's<br>Republic of Korea | NZ | New Zealand                                  |    |                          |
| CM | Cameroon                 | KR | Republic of Korea                        | PL | Poland                                       |    |                          |
| CN | China                    | KZ | Kazakhstan                               | PT | Portugal                                     |    |                          |
| CU | Cuba                     | LC | Saint Lucia                              | RO | Romania                                      |    |                          |
| CZ | Czech Republic           | LI | Liechtenstein                            | RU | Russian Federation                           |    |                          |
| DE | Germany                  | LK | Sri Lanka                                | SD | Sudan  |    |                          |
| DK | Denmark                  | LR | Liberia                                  | SE | Sweden                                       |    |                          |
| EE | Estonia                  |    |  | SG | Singapore                                    |    |                          |

Improvements relating to Injection Devices

This invention relates to injection devices and is particularly but not exclusively concerned with those for capsules where two ingredients are initially separated, but which are mixed immediately prior to injection. These are well known, and will not be described in detail. But a typical arrangement is to have liquid in a rear chamber of the capsule and powder in a forward chamber, the two being connected by a narrow bypass passage. The first stage is to compress the liquid so it forces its way through the bypass gradually to infiltrate and mix with the powder. Then, in the second stage, the plunger is urged forwards and the mixture is injected through the needle at the leading end.

It is the aim of this invention to have a device that will accept such a capsule, with its needle, and operate it, at the same time being of simple construction, with as few parts as possible so that it can be a throwaway item.

According to the present invention there is provided an injection device comprising a two-part barrel, the parts being mutually telescoped and containing spring means to act in a forward direction on a capsule housed therein, the forward part providing a passage at its leading end through which a needle at the leading end of the capsule can be projected, wherein for operation the parts of the barrel have their telescopic overlap increased, which exposes for operation a trigger that holds the capsule in a needle retracted position, actuation of the trigger then releasing

the capsule for that to be urged forwardly by the spring means to project the needle.

The spring means may also be arranged, after urging the capsule forwards, to have residual energy to act on the  
5 contents of the capsule to eject a dose through the needle.

Conveniently, the forward part of the barrel telescopes into the rearward part.

Preferably the trigger is integrally formed with the part that telescopes into the other one. Generally there  
10 will be detents to prevent the parts being detelescoped from either position.

The spring means will conveniently be a coil spring acting between the rear end of the rearward barrel part and the rear end of the capsule.

15 When the capsule contains two separate components, with a plunger at the rear end of the capsule acted upon by the spring means, the increase in telescopic overlap is conveniently arranged to cause the spring means to be compressed and subsequently re-expand to press the plunger forwards and  
20 thereby force one component in the capsule to mix with the other component. The travel of the plunger within the capsule during the mixing operation will preferably be less than the mutual movement of the two barrel parts when the overlap is increased, whereby the spring means will have  
25 residual energy after the components have been mixed, first, when the trigger is activated, to shoot the capsule forwards to a limit, acting on the plunger, this projecting the needle, and then to press the plunger further into the

capsule and thereby eject a dose through the needle.

With a double-ended needle there can be a lost motion connection between means carrying the needle and the capsule which is taken up during the forward movement of the capsule, causing the rear end of the needle to pierce a  
5 membrane defining the forward end of a dose chamber of the capsule.

For a better understanding of the invention one embodiment will now be described, by way of example, with  
10 reference to the accompanying drawings, in which:

Figures 1-5 are axial sections of an injection device in progressive stages of operation,

Figure 6 is a perspective view of the injection device prior to use, and

15 Figure 7 is a perspective view of the injection device almost ready for use.

The injection device is a two part barrel which contains a capsule 1 with a needle 2 at its leading end. This will have a two component dose which will be mixed and  
20 injected during the course of operation. It can be of known type and will not be described in detail.

The rear part 3 of the barrel is of stepped cylindrical form having a closed rear end 4 and a shoulder 5 at about its mid-length where the diameter increases. This enlarged  
25 section 6 is not completely cylindrical but has a longitudinal slot 7 extending from the shoulder 5 to an enlargement 8 stepped further out from the section 6. At its forward end, this section 6 has an internal rim 9.

The forward part 10 of the barrel is also generally cylindrical but it has an integral trigger 11. This extends in the longitudinal direction and is joined at its mid-length to the main barrel part 10 by bridging webs 12, as  
5 best seen in figures 6 and 7. To the rear of these webs 12, which will serve as pivots being of flexible plastics, the trigger is proud of the part 10 and extends into the enlargement 8 where initially it terminates just short of the slot 7. Forward of its pivot, the trigger steps inwardly  
10 at 13 and then continues forwardly to terminate in an inwardly projecting lug 14. The step 13 and the lug 14 bear on a shoulder of the capsule 1 and the forward end of the needle assembly respectively.

Externally, towards the rear end, the part 10 has two  
15 circumferential ribs 15 and 16, the rearmost one 15 initially cooperating with the rim 9 to retain the two barrel parts together. At its forward end the barrel part 10 narrows to form a passage 17 through which the needle 2 will be projected, this initially being covered by a cap 18 which  
20 plugs into the passage. There, it cooperates with a sheath 19 protecting the needle 2.

Between the rear end of the capsule 1 and the closed end 4 of the part 3 there is a coil spring 20, initially in an expanded, relaxed, condition as shown in Figure 1. This  
25 is the state of the device before use.

For use, the parts 3 and 10 are telescoped further together to the Figure 2 position where the rim 9 snaps over the rib 16 to retain the parts there. The spring 20 is com-

pressed and initiates the component mixing as described. This further telescoping also exposes the rear end of the trigger 11 in the slot 7.

The cap 18 is then removed as shown in Figure 3 and  
5 this pulls away the sheath 19. The mouth of the passage 17 is then held against the skin and the rear end of the trigger 11 is depressed as shown in Figure 4. This pivots the trigger so that the step 13 and the lug 14 release the capsule and needle. The spring 20 therefore shoots the  
10 capsule 1 and needle 2 forwards until the needle is arrested by the entrance to the passage 17. The capsule 1 continues to move forwards so that a membrane at its front end is pierced by the rear end of the double ended needle, and then the final expansion of the spring ejects the dose through  
15 the needle 2.

The detents formed by the ribs 15 and 16 do allow the rim 9 to snap past them in either direction, so that the barrel can be dismantled and put together again for replacement of a capsule. But of course they are sufficient to  
20 stop the two barrel parts simply falling apart.

It will also be understood that, although described in terms of a two-ingredient capsule, the device could work equally well with a single ingredient one that requires no mixing.

CLAIMS

1. An injection device comprising a two-part barrel, the parts being mutually telescoped and containing spring means to act in a forward direction on a capsule housed  
5 therein, the forward part providing a passage at its leading end through which a needle at the leading end of the capsule can be projected, wherein for operation the parts of the barrel have their telescopic overlap increased, which exposes for operation a trigger that holds the capsule in a  
10 needle retracted position, actuation of the trigger then releasing the capsule for that to be urged forwardly by the spring means to project the needle.

2. An injection device as claimed in Claim 1, wherein the spring means are arranged, after urging the capsule  
15 forwards, to have residual energy to act on the contents of the capsule to eject a dose through the needle.

3. An injection device as claimed in Claim 1 or 2, wherein said forward part telescopes into the rearward part.

4. An injection device as claimed in Claim 1, 2 or 3,  
20 wherein the trigger is integrally formed with the part that telescopes into the other part.

5. An injection device as claimed in any preceding claim, wherein there are detents to resist the parts being  
detelescoped from the initial position and from the  
25 increased overlap position.

6. An injection device as claimed in any preceding claim, wherein the spring means is a coil spring acting between the rear end of the rearward barrel part and the




rear end of the capsule.

7. An injection device as claimed in any preceding claim, in combination with a capsule containing two initially separate components, wherein a plunger at the rear  
5 end of the capsule is acted upon by the spring means, the increase in telescopic overlap causing the spring means to be compressed and subsequently re-expand to press the plunger forwards and thereby force one component in the capsule to mix with the other component.


10 8. An injection device as claimed in Claim 7 as appendant to Claim 2, wherein the travel of the plunger within the capsule during the mixing operation is less than the mutual movement of the two barrel parts when the overlap is increased, whereby the spring means has residual energy  
15 after the components have been mixed, first, when the trigger is activated, to shoot the capsule forwards to a limit, acting on the plunger, this projecting the needle, and then to press the plunger further into the capsule and thereby eject a dose through the needle.

20 9. An injection device as claimed in any preceding claim, in combination with a capsule, wherein the needle is double-ended and there is a lost motion connection between means carrying the needle and the capsule which is taken up during the forward movement of the capsule, causing the rear  
25 end of the needle to pierce a membrane defining the forward end of a dose chamber of the capsule.

1/3



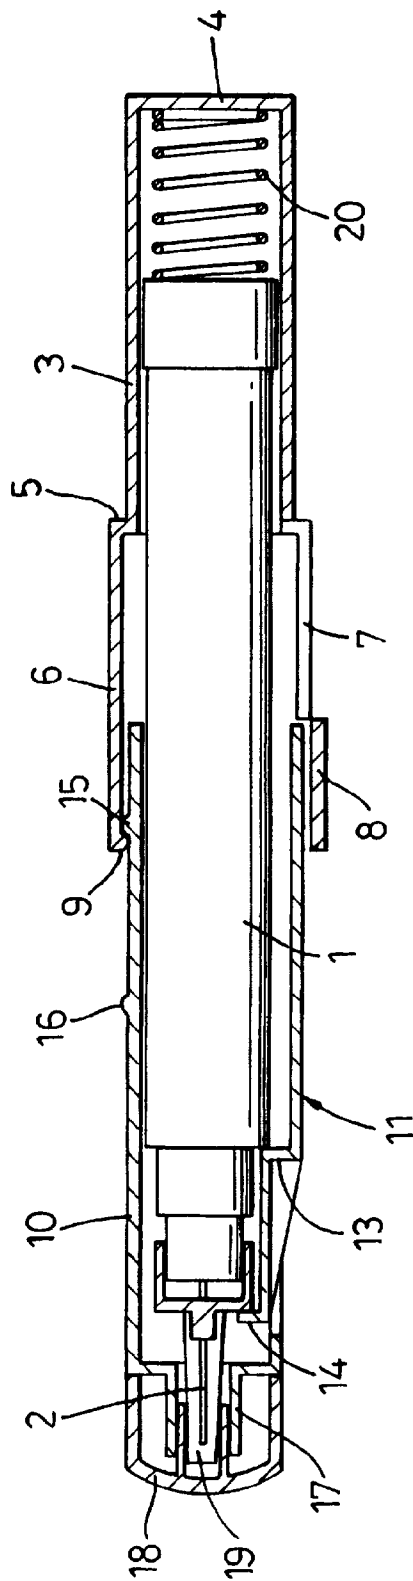


*Fig. 1*


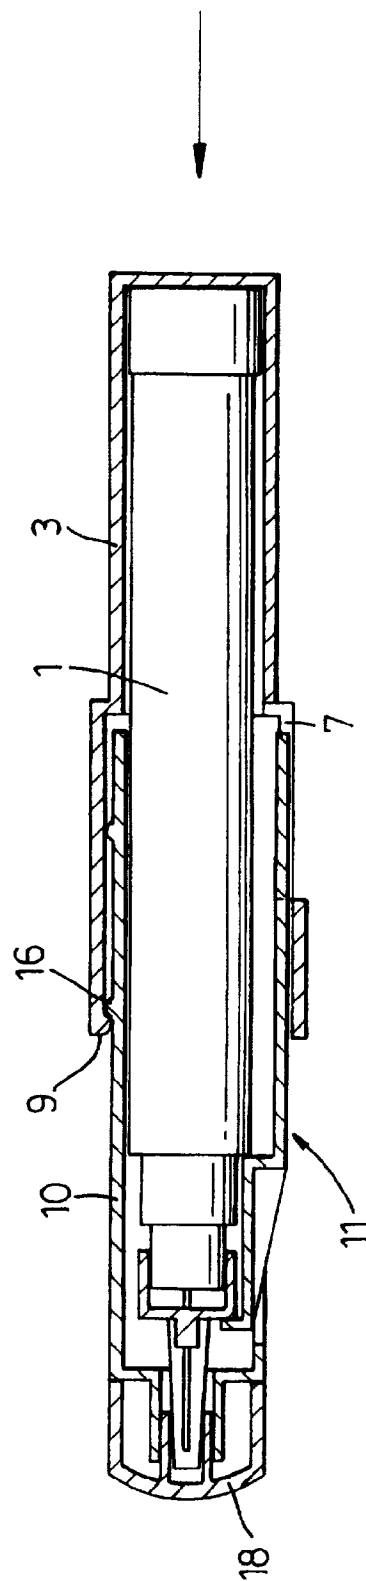


*Fig. 2*

2/3

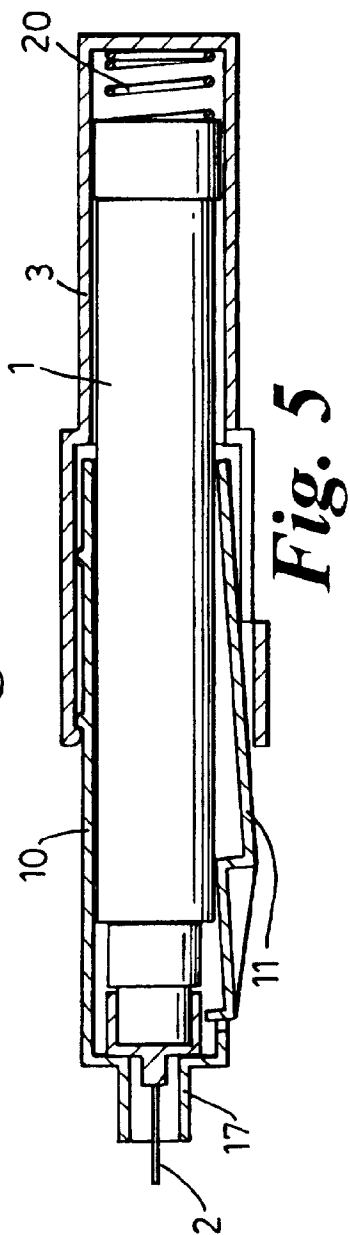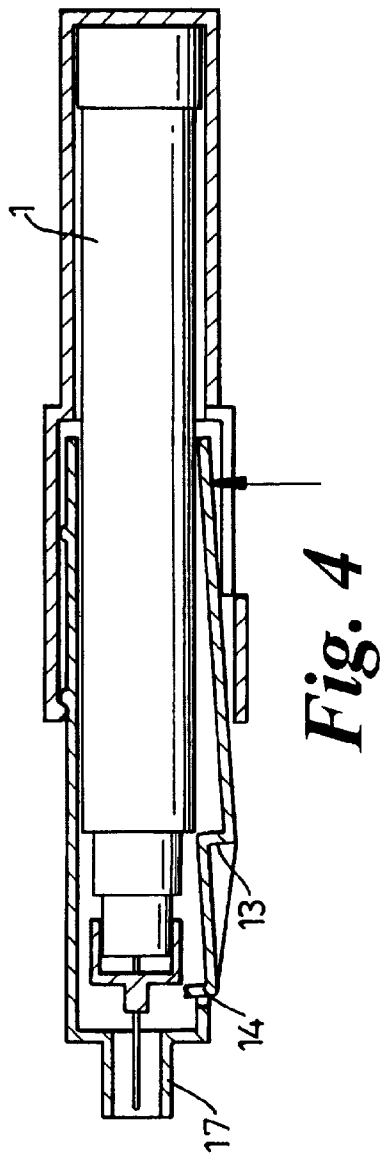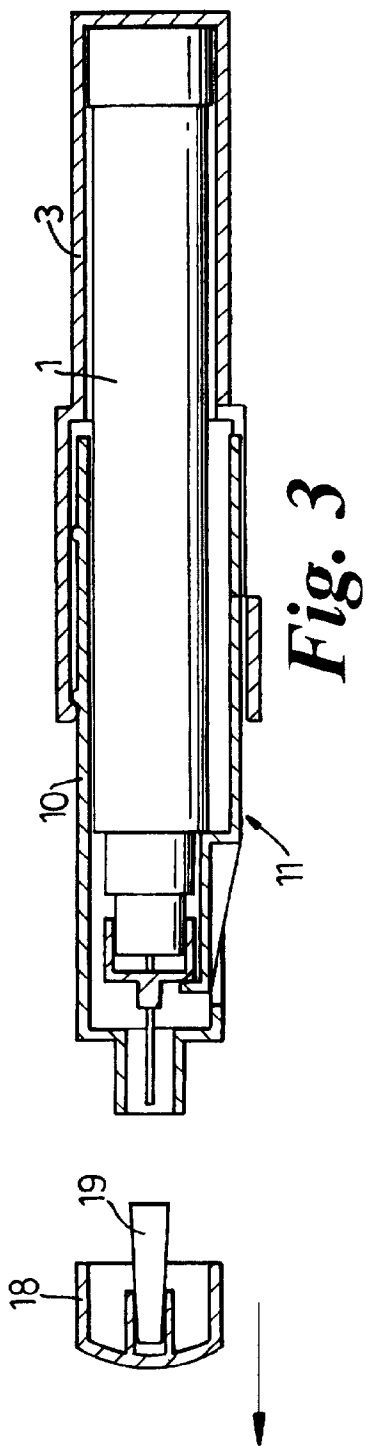

3/3

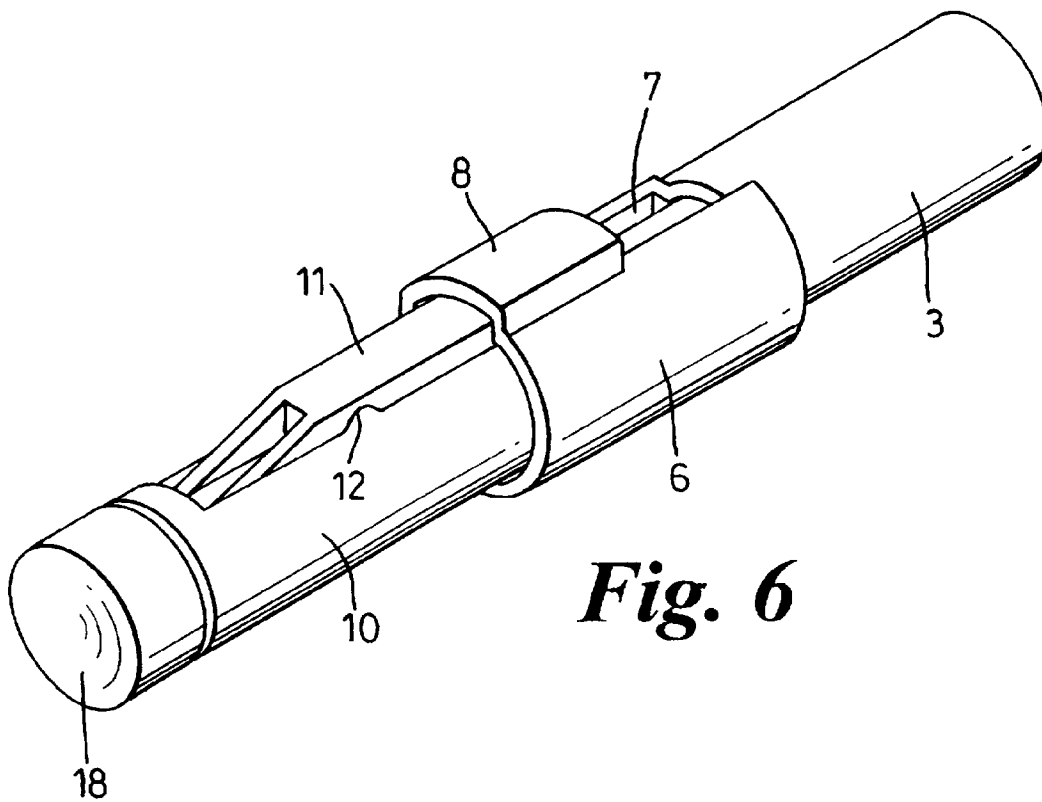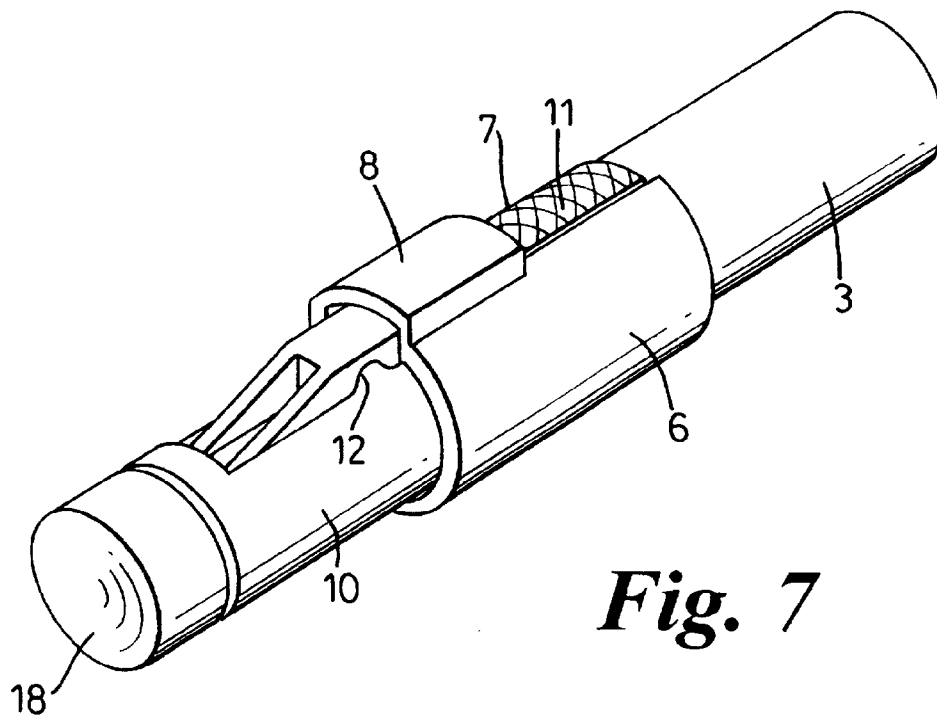**Fig. 6****Fig. 7**

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 97/01614

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A61M5/20

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages  | Relevant to claim No. |
|------------|---|-----------------------|
| X          | WO 95 19194 A (LABORATOIRE AGUETTANT) 20 July 1995<br>see page 16, line 1 - line 16<br>see figures 7,8                                    | 1-4,6                 |
| A          | ---   | 5                     |
| X          | FR 1 014 881 A (HANON) 25 August 1952<br>see page 2, left-hand column, line 39 -<br>page 2, right-hand column, line 39<br>see figures 2,3 | 1-3,6,8               |
| A          | ---   |                       |
| A          | BE 511 524 A (WAUTERS) 14 June 1952<br>see figure 1   | 1-4,6                 |
| A          | ---   |                       |
| A          | DE 378 714 C (DE MONTET) 26 February 1921<br>see the whole document   | 1-4                   |
|            | ---   |                       |
|            | -/--  |                       |



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 October 1997

Date of mailing of the international search report

28. 10. 97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Sedy, R

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 97/01614

| C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT |  |                       |
|--|--|-----------------------|
| Category *   | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No. |
| A  | FR 505 931 A (HELLER) 10 August 1920<br>see page 1, line 15 - line 17<br>see page 2, line 39 - line 44<br>see figure 2<br>---              | 4,5                   |
| A  | FR 2 506 161 A (SOCIETE D'ARMEMENT ET<br>D'ETUDES SAE ALSETEX) 26 November 1982<br>see page 2, line 29 - line 33<br>see figures 1-3<br>--- | 7                     |
| A  | DE 88 13 938 U (NOTHDURFT) 7 December 1989<br>see figures 1-3<br>-----   | 7,9                   |

# INTERNATIONAL SEARCH REPORT

Internal Application No

PCT/GB 97/01614

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---------------------|----------------------------|---------------------|
| WO 9519194 A                              | 20-07-95            | FR 2715071 A               | 21-07-95            |
|   |                     | AU 1539195 A               | 01-08-95            |
|   |                     | CA 2181255 A               | 20-07-95            |
|   |                     | EP 0740557 A               | 06-11-96            |
| -----                                     |                     |                            |                     |
| FR 1014881 A                              | 12-09-52            | NONE                       |                     |
| -----                                     |                     |                            |                     |
| BE 511524 A                               |                     | NONE                       |                     |
| -----                                     |                     |                            |                     |
| DE 378714 C                               |                     | NONE                       |                     |
| -----                                     |                     |                            |                     |
| FR 505931 A                               | 10-08-20            | NONE                       |                     |
| -----                                     |                     |                            |                     |
| FR 2506161 A                              | 26-11-82            | FR 2519866 A               | 22-07-83            |
| -----                                     |                     |                            |                     |
| DE 8813938 U                              | 07-12-89            | NONE                       |                     |
| -----                                     |                     |                            |                     |